

Description


- » 400 Nm torque
- » Open/Close function
- » Standardized interfaces (ISO 5211, DIN 3337)
- » Two and more actuators can be used in parallel
- » Brushless high performance motor
- » Overload protection
- » Visual position indicator
- » Integrated heating resistor 3 W
- » End position feedback open/close



Technical data

Electrical data	Rated voltage	230V AC/DC	24V AC/DC
	Voltage range	95-265V AC / 100-300V DC	20-26V AC / 22-30V DC
	Power consumption	max. 80 W	
	Peak current	0,36A@5ms @AC230V	3,3A@5ms @DC24V
	Fuse	2A	8A
Functional data	Rated torque	400 Nm	
	Nominal angle	90° ±2°	
	Max. angle	330° ±5°	
	Manual override	Currentless with allen key	
	Operating time (90°)	approx. 25 seconds	
	Operating mode	S3-75% (AC) S3-85% (DC) - loading ≤85% rated torque according to IEC60034-1-2017	
	Position indicator	Mechanical	
	Electricity safety level	Class I	Class III
	Protection class	IP67	
	Insulation resistance	100MΩ / 1500V DC	100MΩ / 500V DC
Operating conditions	Withstand voltage	1500V AC / 1 min	500V AC / 1 min
	Mounting position	Any mounting position	
	Temperature range	-20° ... +60°C	
	Storage temperature	-40° ... +80°C	
	Humidity	5 ... 95%, non-condensing	
	Shock resistance	≤5g	
	Vibration	10 ... 55 Hz / 1,5 mm double amplitude	

Dimensions

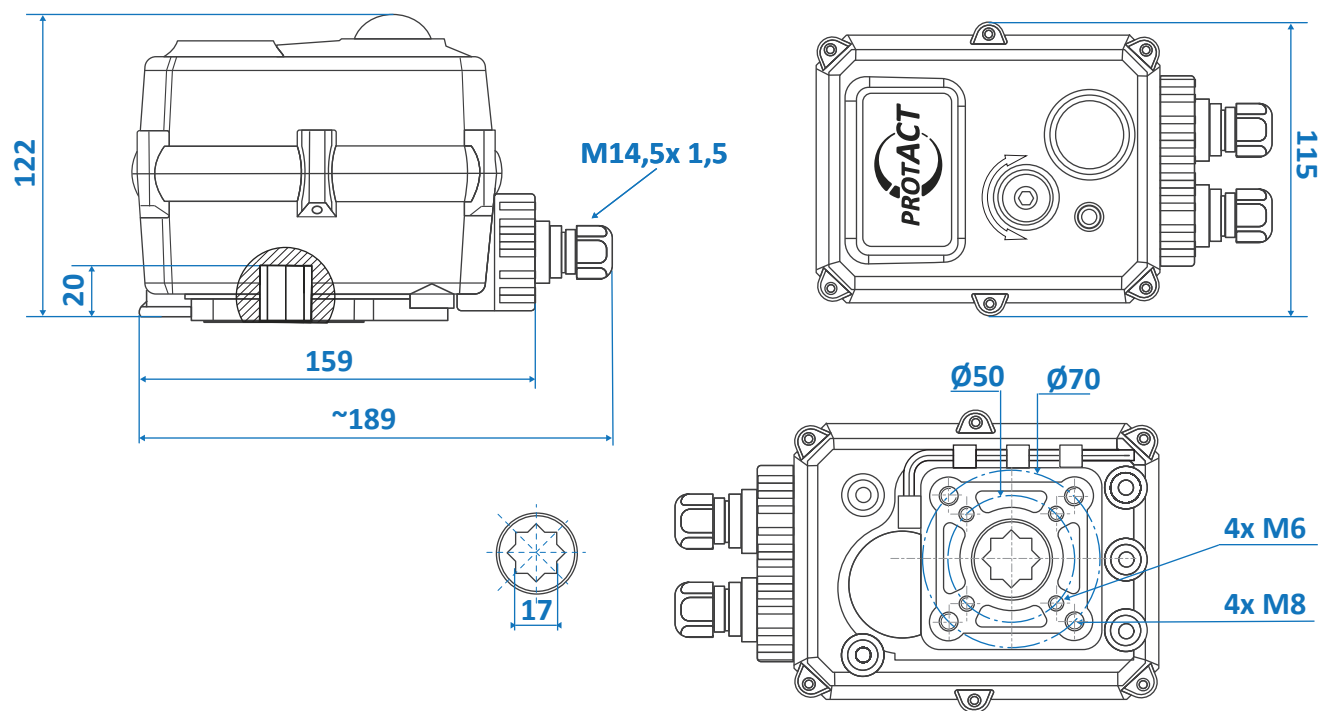

Ø Stem connection	Depth stem connection	ISO 5211	Weight
22 mm	30 mm	F07/F10	6,5 kg

Materials

	<table><tr><td>1</td><td>Body</td><td>Heatproof ABS</td></tr><tr><td>2</td><td>Screws</td><td>304</td></tr><tr><td>3</td><td>Manual shaft</td><td>304</td></tr><tr><td>4</td><td>Oil seal</td><td>NBR</td></tr><tr><td>5</td><td>Label</td><td>PVC</td></tr></table>	1	Body	Heatproof ABS	2	Screws	304	3	Manual shaft	304	4	Oil seal	NBR	5	Label	PVC	<table><tr><td>6</td><td>Wrench fixation</td><td>Heatproof ABS</td></tr><tr><td>7</td><td>Hexagon wrench</td><td>Tool steel</td></tr><tr><td>8</td><td>Waterproof cable connector</td><td>Polyamide</td></tr><tr><td>9</td><td>Lid seal</td><td>NBR</td></tr><tr><td>10</td><td>Terminal cover</td><td>Heatproof ABS</td></tr></table>	6	Wrench fixation	Heatproof ABS	7	Hexagon wrench	Tool steel	8	Waterproof cable connector	Polyamide	9	Lid seal	NBR	10	Terminal cover	Heatproof ABS
1	Body	Heatproof ABS																														
2	Screws	304																														
3	Manual shaft	304																														
4	Oil seal	NBR																														
5	Label	PVC																														
6	Wrench fixation	Heatproof ABS																														
7	Hexagon wrench	Tool steel																														
8	Waterproof cable connector	Polyamide																														
9	Lid seal	NBR																														
10	Terminal cover	Heatproof ABS																														

Type code

ESA	TCR	40	N		0710	S	22	H	01
Housing Variant		Size/ Nominal torque		Version		Special function		ISO interfaces	
Stem connection		Stem connection dimension							

Options


- 00: Connection via terminal strip
- 01: with attached plug and mating plug for soldering
- 02-xm: with attached cable end with length „x“ in meters

Supply voltage


- L: 20 ... 26V AC / 22 ... 30V DC
- H: 95 ... 265V AC / 100 ... 300V DC

Electric connection

Connection variant open/closed 3-point

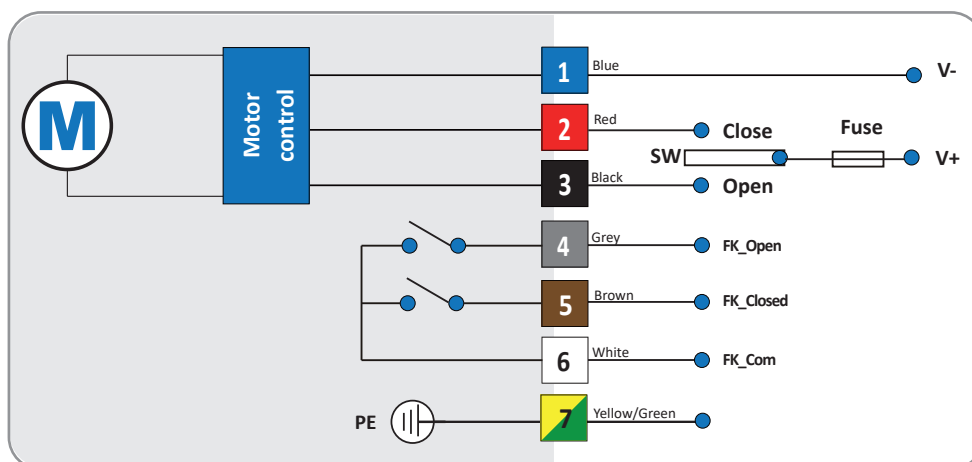

Connection variant open/closed 2-point

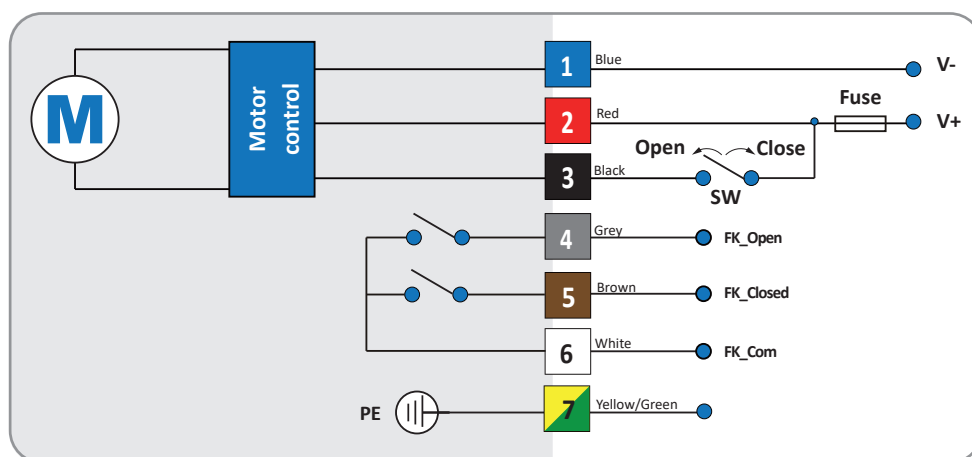

Connector pin assignment

